



Pleated filter bags manufactured from extended-life needle felt

Eaton's MAX-LOAD extended-life pleated filter bags are suitable for a wide range of applications, such as water treatment, chemicals, paints and varnishes, petrochemicals, metal cleaning and many more.

MAX-LOAD pleated filter bags are manufactured from nominal rated polypropylene or polyester extended-life needle felt. The exceptional construction increases the filter bags dirt-holding capacity and lifetime by up to ten times more than standard needle felt filter bags.

Features and benefits

- Increases dirt-holding capacity by up to a factor of ten compared to a similar size standard needle felt filter bag¹ [1.5 lbs (700 g) per filter bag, size 02]
- Lowers maintenance costs due to a longer lifetime
- Fits into all Eaton standard size 01 and size 02 restrainer baskets
- Special surface treatment virtually eliminates fiber migration

- Material is free from silicone and crater-forming substances²
- Patented SENTINEL® seal ring provides 100% bypass-free filtration
- The pressure-activated SENTINEL seal ring provides a flexible, chemically resistant seal which adapts to any bag filter housing

Filter specifications

Materials

Extended-life needle felt polypropylene or polyester

Seal rings

Polypropylene or polyester SENTINEL seal ring

Retention ratings

1, 5, 10, 25, 50 µm

Dimensions/Parameters

Sizes

01: Ø 7 x 14" L (180 x 345 mm)
02: Ø 7 x 29" L (180 x 730 mm)

Filter area

01: 8.6 ft² (0.8 m²)
02: 17.2 ft² (1.6 m²)

Max. operating temperature

Polypropylene: 194 °F (90 °C)
Polyester: 275 °F (135 °C)

Max. differential pressure

36.2 psi (2.5 bar)

Recommended change-out pressure for disposal³

11.6 – 21.7 psi (0.8 – 1.5 bar)


Max. flow rates⁴

01: 44 GPM (10 m³/h)
02: 88 GPM (20 m³/h)




Powering Business Worldwide

MAX-LOAD Filter Bag Range

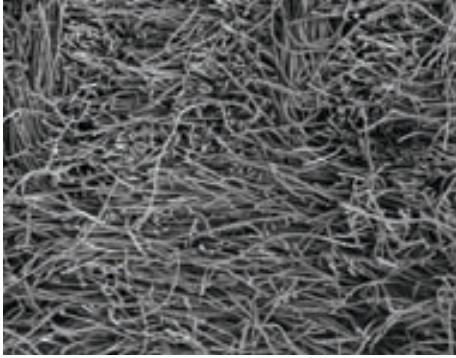

Extended-life needle felt in comparison to standard needle felt


- Finer fibers
- Greater porosity
- Thicker media

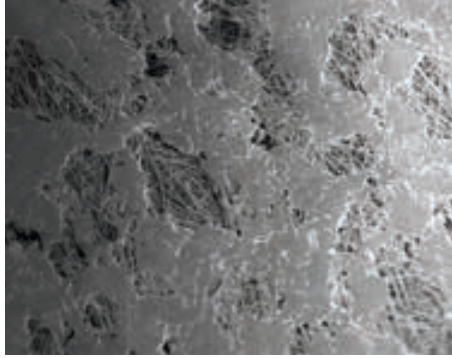

Surface of a MAX-LOAD pleated filter bag

- Glazed finish binds loose fibers on the surface
- Full flow through surface channels

Ordering information

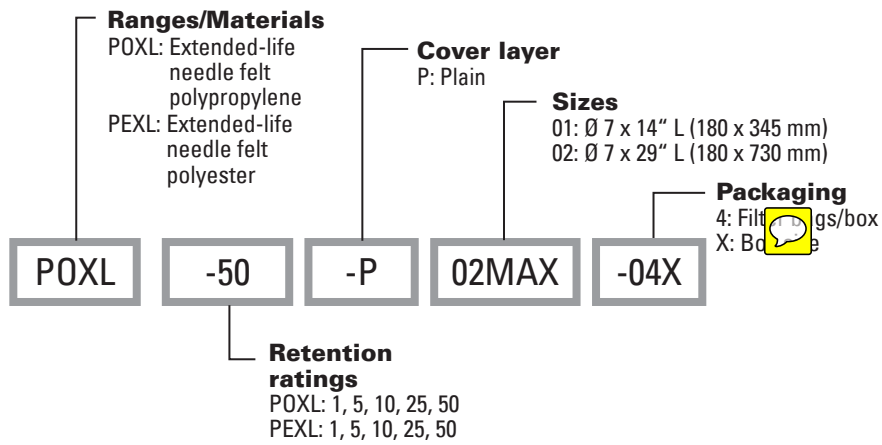

¹ Based on internal lab tests.

² Based on an accepted paint compatibility test (see document QUC-STA-10).

³ Depending on the respective application requirements.

⁴ For liquids with a dynamic viscosity of 1 mPa·s @ 68 °F (20 °C).